




Reposado™ Pro

Classification	ASTM F 1700-04 Class III, type A or B Solid Vinyl Floor Tile
Size*	7" x 48"(nom)
Overall Thickness*	2.5 mm
Wear Layer	20 mil featuring Scuff Shield finish
Edge	Square
Standard Colors	4 colors
Installation Method	Glue-Down
Wear Limited Warranty	Lifetime Residential / 30-Year Light Commercial
Recycled Content	This product contains recycled content. 100% recyclable post-use.
Packaging	41.98 ft ² (3.90 m ²) per carton 18 pieces per carton 60 cartons per pallet
Weight Per Carton	38.42 lbs / 17.43 kg

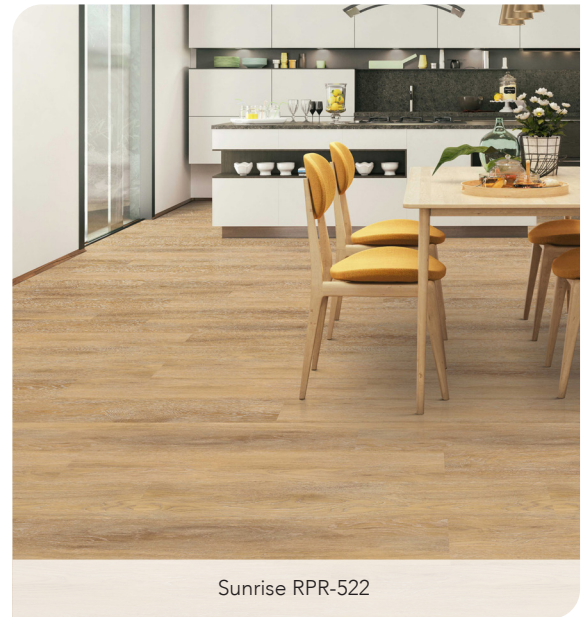

Sunrise RPR-522

Product Testing

Chemical Resistance	ASTM F 925	Passed
Critical Radiant Flux	ASTM E 648	Class I, CRF ≥0.45
Dimensional Stability	ASTM F 2199	Passed
Flexibility	ASTM F 137	Passed
Resistance to Heat	ASTM F 1514	Passed
Resistance to Light	ASTM F 1515	Passed
Smoke Density	ASTM E 662	Passed
Static Load Limit	ASTM F 970	Passed
Thickness	ASTM F 386	Passed




PREMIUM 1 WEAR LIMITED WARRANTY



SCS Certified



Paloma RPR-521



Matador RPR-523



Sunrise RPR-522



Siesta RPR-524

*All measurements are nominal. +Sound Testing will vary depending on the specific floor/ ceiling assembly.

Samples are intended to be a reference for product visuals and may not represent all color, shade, pattern, and texture variations. Actual product may differ from small swatches, printed media, or digital computer images. Visit www.stcfloors.com for full product and warranty details.