





## Technical Data - COMBO Tiles

## OPT Tiles

COMBO OPT Tiles is a high level LVT-Flooring (tiles in 16 Decors) for residential and contract use.

Characteristic	Norm	Data
Type of flooring	EN 649	Heterogen, PVC
Surface treatment		PU
Size	EN 427	OPT23: 30,48 x 91,44 cm / Unisono: 45,72 x 45,72 cm OPT24: 31,20 x 61,60 cm / Others: 45,72 x 91,44 cm
Total thickness	EN 428	2,5 mm
Wearlayer thickness	EN 429	0,55 mm
Beveled edges		Only OPT 24 Micro-beveled / Others: no beveled edges
Performance classification	EN 685	23, 33, 42
Weight per m <sup>2</sup> (approx.)	EN 430	OPT23 4,6 kg / Unisono 4,7 kg / Others 4,8 kg
Number of pieces per carton		OPT 23 10 = 2,79 m <sup>2</sup> / OPT24 18 = 3,46 m <sup>2</sup> OPT 26, 816,817,2500,2502,2504 10 = 4,18 m <sup>2</sup> OPT 25,27,28,29,30,31 8 = 3,34m <sup>2</sup> / Unisono 19 = 3,97m <sup>2</sup>
Wear group	EN 660-2	Group T
Residual indentation	EN 433	Conforms
Fire	EN 13501-1	Bfl- S1
Reduction transmission impact noise	EN 140-8	5 dB
Color fastness	ISO 105-B02	≥6
Anti-slip classification	DIN 51130	OPT 23,25,26,816,817,2502,2504,2506, Unisono: <b>R9</b> OPT 24,27,28,29,20,31: <b>R10</b>
Resistance to chemicals	EN 423	Unchanged *
Suitable for floor heating		Yes
Castor chair suitability	EN 425	Yes (Type W)
Emissionen AgBB Z 156.603-1194		Conforms
DoP (Declaration of performance)		052310214
Cleaning and maintenance		CC-Dr. Schutz (or similar)

\* during brief exposure to regular household products

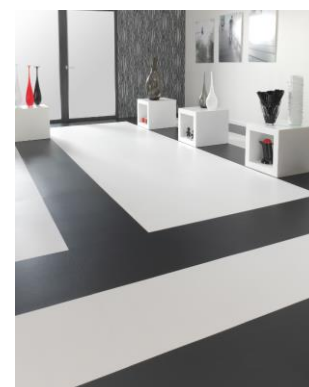

04.08.2015